




- **DRIVE SPROCKETS WITH TEETH FOR POSITIVE ENGAGEMENT AND SMOOTH RETURN SPROCKETS FOR BELT GUIDANCE**

Standard thickness 15 mm – available in all sizes and bore types

Materials:

- **POM**, white, FDA compliant ,for standard applications, operating temperature -40°C to +85°C
- **AISI 304** stainless steel
- **C40 carbon steel** or equivalent
- **Aluminum**

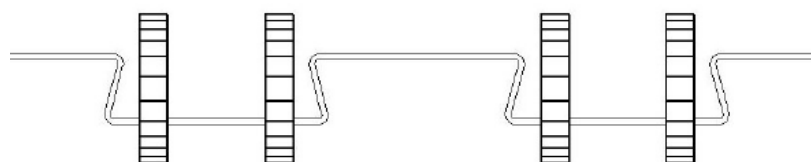

STANDARD PROCKETS SIZES – any other dimensions available on request

Pitch mm	Max. wire diameter mm	Teeth Nr (Z)	Pitch Diameter mm	External Diam. mm
4	1	32	40,76	45,00
5	1,2	26	41,40	45,50
6	1,4	24	45,86	50,50
7	1,6	25	55,73	60,50
8	1,8	22	56,05	60,50
9	2	23	65,92	70,00
10	2	21	66,88	71,00
11	2	19	66,56	71,00
12	2,35	18	68,79	73,00
12,7	2,35	17	68,76	73,00

- **JOINING TUBES FOR BELTS in stainless steel**

suitable for wire diameters from 1 mm to 2.8 mm

Diameters mm
1
1,2
1,4
1,6
1,8
2
2,35
2,5
2,8



- **REF. 4180 - STANDARD SLIDING PROFILES**





Material: **Natural white HD polyethylene** – operating temperature **-45°C to +60°C** – food-grade certified

Facilitate smooth belt sliding and compensate for thermal expansion/contraction

Guide rail in AISI 304 stainless steel

Standard thickness 1.5 mm

Supplied in 3 mt bars - minimum supply: 10 bars

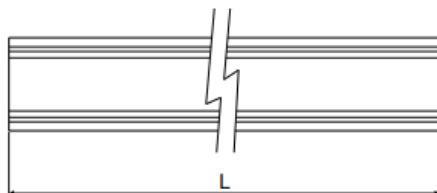

- **REF. 3770 - HIGH TEMPERATURE SLIDING PROFILES**





For use inside ovens, fryers, or in steam/hot air environments





HIGH TEMPERATURE RESISTANCE

Material: Natural white **PTFE** – **continuous operating temperature up to +260°C** – food-grade certified
 Guide rail in AISI 304 stainless steel, standard thickness 1.5 mm
 Supplied in 3 mt bars, minimum supply: 10 bars

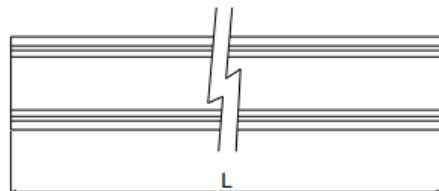

- **REF.4120 GUIDE RAIL CLAMPS for securing sliding profiles 4180 and 3770**

Clamp body and fasteners in AISI 304 stainless steel
 Available in H = 15 mm or H = 20 mm
 Minimum supply: 24 pcs per type

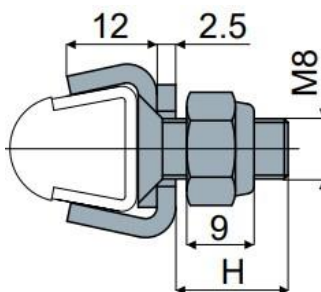

+39 059364813



info@italconveyors.com
 www.italconveyors.com



Italconveyors S.r.l.
 Via Gandhi, 9/A 41122 Modena - Italy
 TEL +39 059 364813
 VAT 03082420369