




www.italconveyors.com



HONEY COMB CONVEYOR BELTS

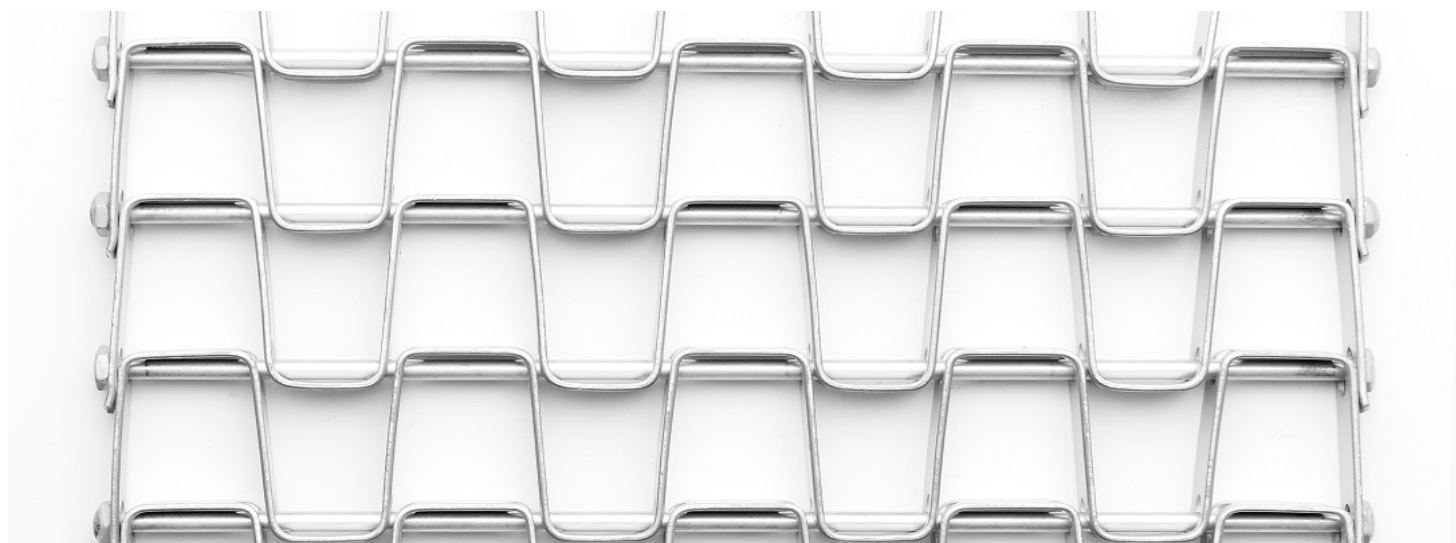

Extremely robust belts with a large open area, driven by sprockets that ensure stable operation even with heavy loads and wide belt widths

Typical Applications

Shrink tunnel ovens

Washing, drying, and dehydration systems, wherever a large open area is required

Transport of metal parts during processing


Materials Available

Carbon steel

Galvanized steel

Stainless steel AISI 304

TYPES AND DIMENSIONS

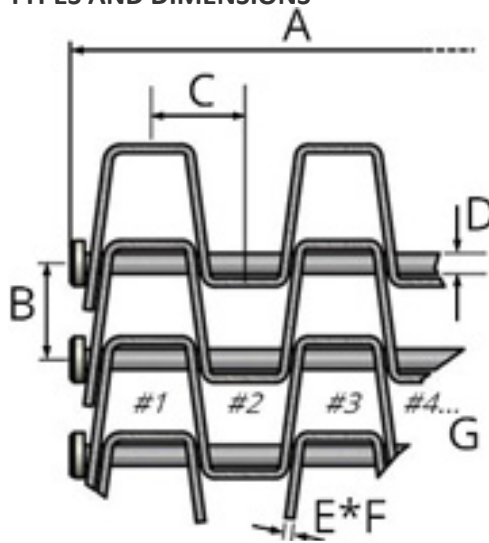

TYPE 1

Pitch B X C = **30,6 X 22 mm**

Cross rods $\varnothing D = 4$ mm

Flat wire E x F = 1,5 X 12,5 mm

Weight: 15 Kg/mq

- Sprockets available in C45 steel:
 - Z10** – pitch diameter 99.02 mm
 - Z13** – pitch diameter 127.86 mm
 - Z20** – pitch diameter 195.61 mm

TYPE 2

Pitch B x C = 13,7 X 14,7 mm

Cross rods $\varnothing D = 3$ mm

Flat wire E x F = 1,2 X 9,5 mm

Weight 15,2 Kg/mq

- Sprockets available in C45 steel:
 - Z16** – pitch diameter 70.22 mm
 - Z30** – pitch diameter 131,06 mm
 - Z44** – pitch diameter 192,04 mm



A = belt width. For available belt widths, please contact us

#1, #2, #3, #4... = slots for sprocket engagement

For any technical or commercial information, please contact us

Contacts



+39 059364813



info@italconveyors.com
www.italconveyors.com



Italconveyors S.r.l.
Via Gandhi, 9/A
41122 Modena - Italy
TEL +39 059 364813
VAT 03082420369